



TREELIFTS.COM



STANDARD FEATURES

High Torque Drive system

Extreme Gradeability - market leading

Rear Oriented Boom position

Auto Levelling Basket

Maximum Approach Angle - market leading

OSHA and ANSI 92.20 Standards certified

Dual Power Sources - Diesel Engine & standard 110V/60Hz Electricity

High Pressure Water/Air connection to Basket

110V Power Supply to the Basket

Automatic Stabilization

Negative Working Height - market leading

Remote Management and Diagnostic software

Radio Control

Up & Over - market leading

Invisible Boom

ADDITIONAL/OPTIONAL FEATURES

Non-marking Tracks

Custom Paint Options available (Upper and Lower sections)

Brushes for Boom Protection Hook & Crane certification

Optional 1 Man Basket Cage for materials handling

Optional Cages Extra Large Basket
Optional Crane Hook Fiberglass Basket

Optional Crane Hook
Auto-close Functionality
Fibe

LITHIUM version available







TECHNICAL SPECIFICATIONS


Live load in working position

MEASUREMENTS

Α	Height Stowed with basket	7' 0"
В	Overall Length with basket	16' 2"
С	Overall Width with basket	4' 7"
D	Height Stowed without basket	6' 5"
Ε	Overall Length without basket	14' 3"
F	Overall Width without basket	2' 8"
G	Track L x W	4' 8" x 3' 9"
Н	Length outrigger footprint. Standard	12'
1	Width outrigger footprint. Standard	11' 10"
L	Length outrigger footprint. One side narrow	v 15' 10"
M	Width outrigger footprint. One side narrow	8' 1"
	Total weight	6062 lbs
	Live load in travelling position	0.624 psi

PERFORMANCE

Platform working height (max)		71' 2"
Horizontal outreach (max)		29' 6"
Negative work		- 9'
Up & over clearance		45' 11"
Basket Capacity		507 lbs
Hook Capacity		573 lbs
Basket rotation		180°
Turret rotation		720°
Gradeability (max)		49 %
Angle of Approach (max with Basket)		42 %
Angle of Approach (max without Basket)		49 %
Max Slope Angle for Stabilization		29 %
Dual power sources Diesel / 110V electricit		V electricity
Travel speed		0.70 mph

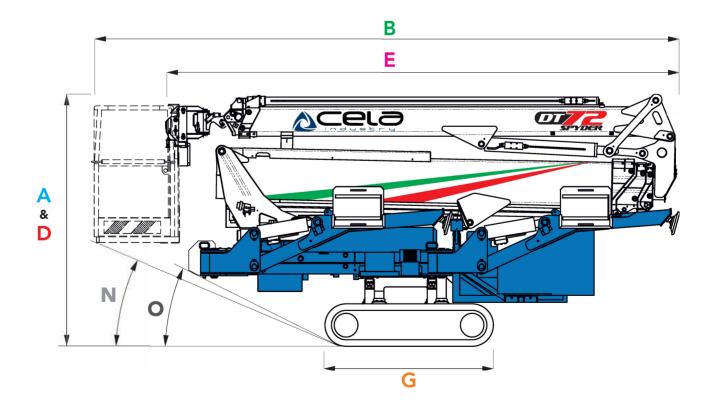


0.363 psi





330-789-8733






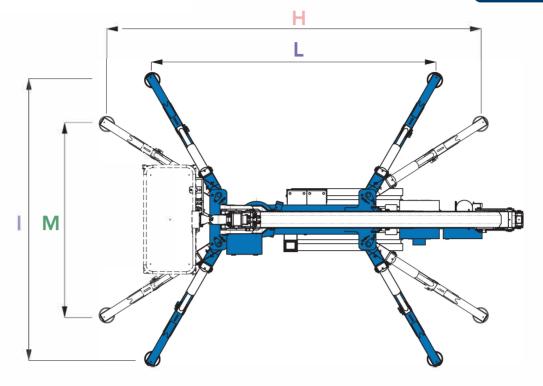



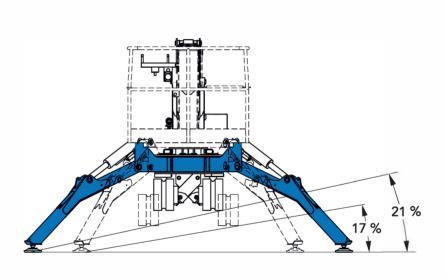

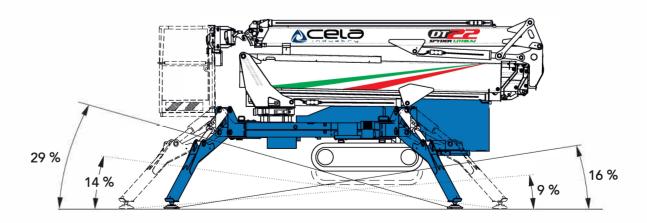





CELA Authorized Dealer: Dependable Equipment

330-789-8733





